


ISA CHRONOGRAPH MOVEMENT

(With 30 Min - Sec hand and Day Counter / Date Window)

A.) Display

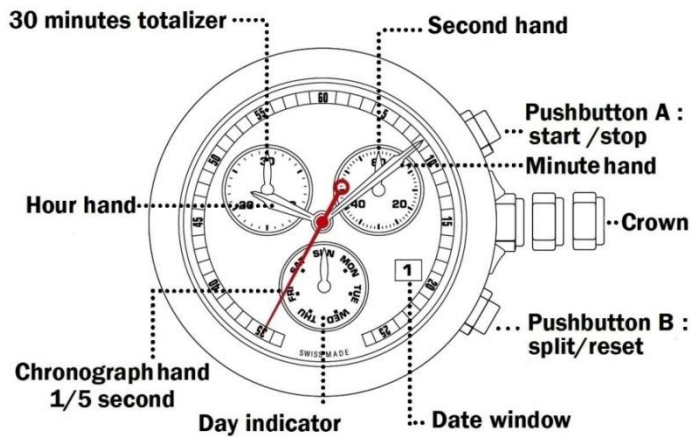

B.) Setting the Time

1. Pull the crown out to "3rd" position.
2. Turn the crown clockwise or counter clockwise to set hour and minute hands until the desired time is set.
3. Push the crown back to the normal position.

C.) Setting the Day Indicator (Sub Dial at 6 o'clock position)

1. Pull the crown to 3rd position.
2. Turn the crown clockwise to advance the day hand until the desired day is set. The day hand will advance one day when 00:00 midnight is reached.
3. Push the crown back to position 1.

D.) Setting the Date

1. Pull the crown out to position 2.
2. Turn the crown clockwise to the desired date.
3. Push the crown back to position 1

E.) Chronograph Operation

1. Start/Stop - Each depression of button "A" will activate the chronograph to start/stop counting.
2. Reset - Push button "A" to stop chronograph, then press button "B" to reset the chronograph to zero position at 12 o'clock.

F.) Sub dial Operation

1. 30 Minutes Counter (Sub dial at 10 o'clock position,) - this will start counting only if the chronograph is activated.
2. Second Hand Counter (Sub dial at 2 o'clock position) - this will work at all time.